

RP-DN-OWL ring downlight + outer wall luminous

order sequence information

RP-DN-OWL

1 **2** **3** **4**

EXAMPLE RP-DN-OWL-48 3000 WHT SPC

1	Cat no.	Description	Delivered lumens
	RP-DN-OWL-24	24" diameter,	1,711 lumens, 20 watts
	RP-DN-OWL-36	36" diameter,	3,421 lumens, 37 watts
	RP-DN-OWL-48	48" diameter,	4,561 lumens, 50 watts
	RP-DN-OWL-60	60" diameter,	6,842 lumens, 75 watts
	RP-DN-OWL-84	84" diameter,	10,263 lumens, 115 watts
	RP-DN-OWL-96	96" diameter,	11,403 lumens, 124 watts
	RP-DN-OWL-108	108" diameter,	13,684 lumens, 147 watts
	RP-DN-OWL-144	144" diameter,	19,386 lumens, 208 watts

Cat no.	High Lumen Output	Delivered lumens
RP-DN-OWL-24-HO	24" diameter,	3,521 lumens, 40 watts
RP-DN-OWL-36-HO	36" diameter,	6,842 lumens, 72 watts
RP-DN-OWL-48-HO	48" diameter,	9,123 lumens, 100 watts
RP-DN-OWL-60-HO	60" diameter,	13,682 lumens, 150 watts
RP-DN-OWL-84-HO	84" diameter,	20,526 lumens, 230 watts
RP-DN-OWL-96-HO	96" diameter,	22,807 lumens, 250 watts
RP-DN-OWL-108-HO	108" diameter,	27,368 lumens, 295 watts
RP-DN-OWL-144-HO	144" diameter,	38,771 lumens, 420 watts

* LEDs are Luxeon XF-3535L. Drivers are Class 2, 120-277 volt, and include two wire 0-10v dimming, 1-100%.

2	LED COLOR TEMP
2700	2700°K CRI >80
3000	3000°K CRI >80
3500	3500°K CRI >80
4000	4000°K CRI >80

• **RGB Options** RGB and RGB + white (2700K) LED options are available. Hand held remote included and phone Apps are available. Decoder options for connecting to a DMX system.

3	COLOR
WHT	Matte white powder coat
GRY	Matte gray (RAL7035) powder coat
ASL	Anodized silver powder coat
RAL	Specify 4 digit RAL color number

4	MOUNTING
MCC	Multiple suspension cables attach to a center canopy • 24, 36, 48, 60 and 84 inch diameter rings have 3 cables. Larger sizes have six cables.
SPC	Single point canopies (with one feed canopy) • 24, 36, 48, 60 and 84 inch diameter rings have 3 sets of canopy/cables. Larger sizes have six canopy/cable sets. • Canopies are matte white. 5 wire SJT cords are white. Cables are adjustable. Standard length is 100".
CMT	Ceiling mount

PROJECT: _____ TYPE: _____

DATE: _____




Housing: Formed aluminum.

Lens: Translucent acrylic

Certification: UL listed.

Warranty: 5 year limited warranty.

- 24", 36" 48" and 60" fixtures ship in one piece.
- 72", 96", 108" and 144" fixtures ship in three pieces for field assembly.

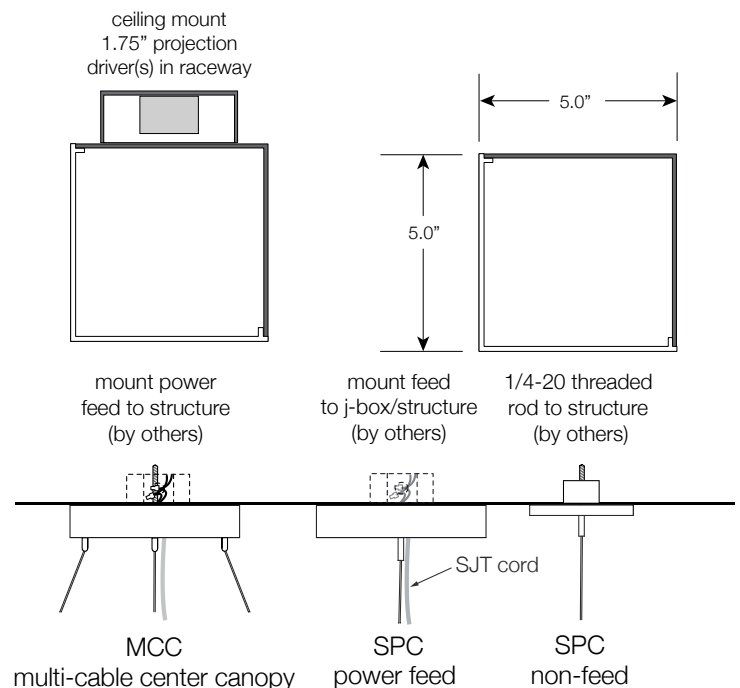

LUMOS

Denver, Colorado www.lumoscustom.com