

RP-LUM

luminous ring

order sequence information

RP-LUM-

EXAMPLE **1** RP-LUM-48 **2** 3000 **3** WHT **4** CMT

PROJECT: _____

TYPE: _____

DATE: _____

1	CAT NO.	DESCRIPTION	DELIVERED LUMENS	
	RP-LUM-24	24" diameter,	3,668 lumens,	35 watts
	RP-LUM-36	36" diameter,	4,890 lumens,	45 watts
	RP-LUM-48	48" diameter,	6,113 lumens,	73 watts
	RP-LUM-60	60" diameter,	7,335 lumens,	85 watts
	RP-LUM-72	72" diameter,	9,780 lumens,	105 watts
	RP-LUM-84	84" diameter,	12,225 lumens,	125 watts
	RP-LUM-96	96" diameter,	12,225 lumens,	125 watts
	RP-LUM-108	108" diameter,	14,670 lumens,	150 watts
	RP-LUM-120	120" diameter,	16,300 lumens,	180 watts
	RP-LUM-144	144" diameter,	19,560 lumens,	210 watts

	CAT NO.	HIGH OUTPUT	DELIVERED LUMENS	
	RP-LUM-24-HO	24" diameter,	7,153 lumens,	70 watts
	RP-LUM-36-HO	36" diameter,	9,536 lumens,	90 watts
	RP-LUM-48-HO	48" diameter,	11,920 lumens,	144 watts
	RP-LUM-60-HO	60" diameter,	14,303 lumens,	170 watts
	RP-LUM-72-HO	72" diameter,	19,071 lumens,	210 watts
	RP-LUM-84-HO	84" diameter,	23,839 lumens,	250 watts
	RP-LUM-96-HO	96" diameter,	23,839 lumens,	250 watts
	RP-LUM-108-HO	108" diameter,	28,607 lumens,	300 watts
	RP-LUM-120-HO	120" diameter,	31,786 lumens,	340 watts
	RP-LUM-144-HO	144" diameter,	38,142 lumens,	420 watts

- LEDs are Lumileds XF-3535. Drivers are constant current, Class 2, 120-277 volt, and include two wire 0-10v, 1-100% dimming.
- Other size diameters available, contact factory.

2 LED COLOR TEMP

2700 2700°K CRI >80

3000 3000°K CRI >80

3500 3500°K CRI >80

4000 4000°K CRI >80

- RGB Options RGB and RGB + white (2700K) LED options are available. Hand held remote included and phone Apps are available. Decoder options for connecting to a DMX system.

3 COLOR - JOINER BANDS AND TOP CHANNEL

WHT Matte white powder coat

GRY Matte gray (RAL7035) powder coat

ASL Anodized silver powder coat

RAL Specify 4 digit RAL color number




Housing: Formed aluminum, integral drivers in top channel

Lens: Translucent acrylic

Certification: UL listed.

Warranty: 5 year limited warranty.

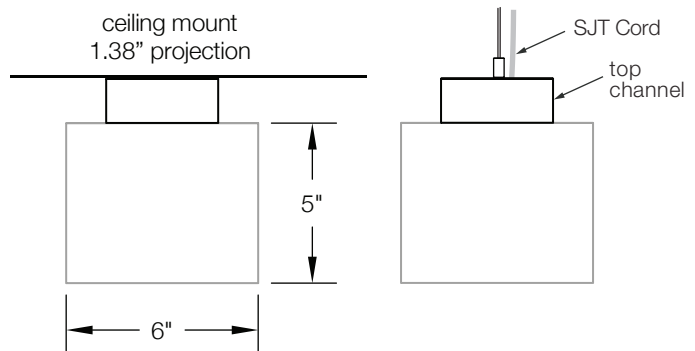

RP-LUM

luminous ring

MOUNTING



MCC Multiple suspension cables attach to a center canopy

- 24, 36, 48, 60, 72 and 84 inch diameter rings have 3 cables. Larger sizes have six cables.

SPC Single point matte white canopies (with one feed canopy)

- 24, 36, 48, 60, 72 and 84 inch diameter rings have 3 sets of canopy/cables. Larger sizes have six canopy/cable sets.
- Canopies are matte white. 5 wire SJT cords are white. Cables are adjustable. Standard length is 100".

CMT Ceiling mount

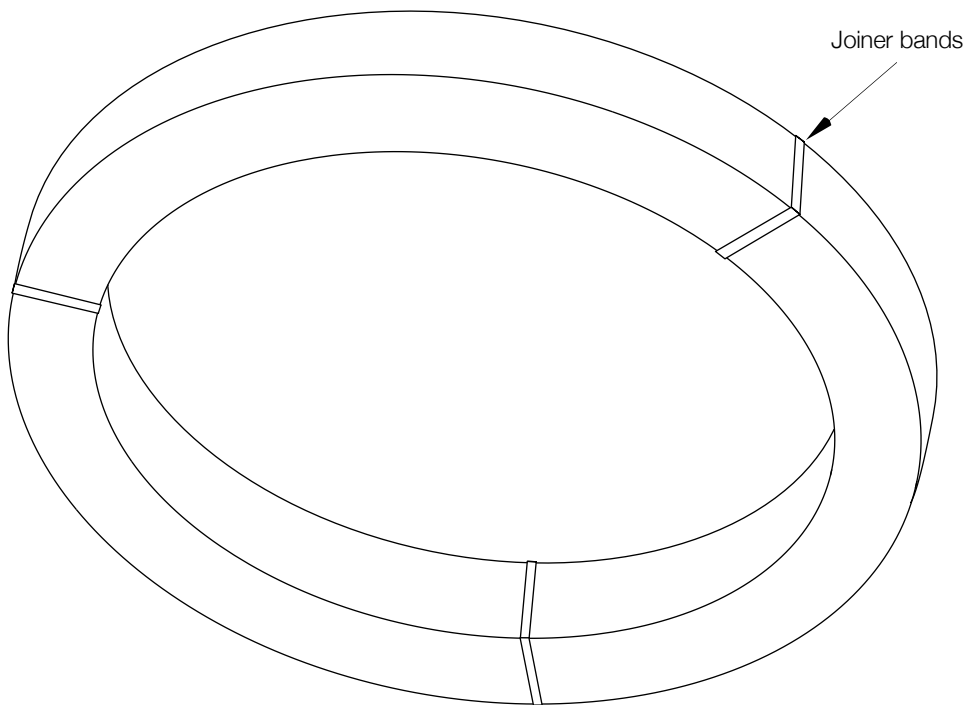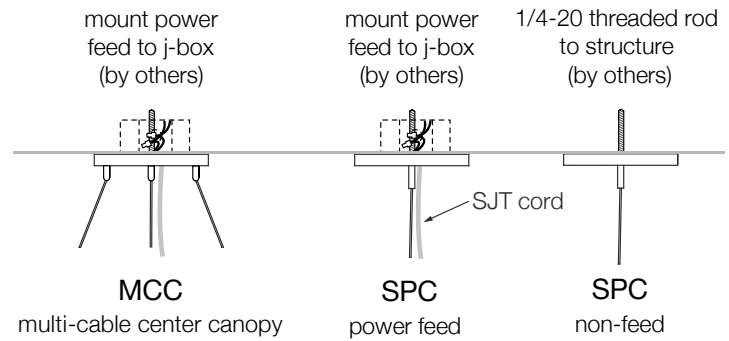

MOUNTING POINTS PER RING DIAMETER

CAT NO.		MOUNTING POINTS	NUMBER OF SECTIONS TO ASSEMBLE
RP-LUM-24	24" diameter	3	ships in one piece
RP-LUM-36	36" diameter	3	ships in one piece
RP-LUM-48	48" diameter	3	ships in one piece
RP-LUM-60	60" diameter	3	ships in one piece
RP-LUM-72	72" diameter	3	3
RP-LUM-84	84" diameter	3	3
RP-LUM-96	96" diameter	6	3
RP-LUM-108	108" diameter	6	6
RP-LUM-108	120" diameter	6	6
RP-LUM-144	144" diameter	6	6