

# LC2

# 2" LUMINOUS CYLINDER

## order sequence information

### LC2-

EXAMPLE	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
	LC2-48	-	4000	-	-

PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

1	CAT NO.	DESCRIPTION	LUMEN OUTPUT
	LC2-12	12" length,	840 delivered lumens, 7 watts
	LC2-24	24" length,	1,680 delivered lumens, 14 watts
	LC2-36	36" length,	2,520 delivered lumens, 20 watts
	LC2-48	48" length,	3,360 delivered lumens, 28 watts
	LC2-60	60" length,	4,200 delivered lumens, 34 watts
	LC2-72	72" length,	5,040 delivered lumens, 40 watts
	LC2-84	84" length,	5,880 delivered lumens, 47 watts
	LC2-96	96" length,	6,720 delivered lumens, 57 watts



• Drivers are Class 2, 120-277 volt, and include two wire 0-10v dimming, 1-100%.

2	LED COLOR TEMP
	<b>3000</b> 3000°K CRI >80
	<b>3500</b> 3500°K CRI >80
	<b>4000</b> 4000°K CRI >80

3	COLOR - DEFAULT CANOPY COLOR IS MATTE WHITE
	<b>WHT</b> Matte white powder coat
	<b>GRY</b> Matte gray (RAL7035) powder coat
	<b>ASL</b> Anodized silver powder coat
	<b>BLK</b> Satin black powder coat
	<b>RAL</b> Specify 4 digit RAL color number

4	SUSPENSION OPTIONS
	<b>BCC</b> Black canopy with black SJT cord. Standard cable length is 100"
	<b>MBC</b> Clear jacketed metallic braid SJT cord with white canopy. Standard cable length is 100"
	<b>AMT</b> Adjustable cable on the bottom side of the cylinder for angled or horizontal mounting. Standard cable length is 100"

5	OPTIONS
	<b>RMT</b> Remote drivers wired and mounted to a plate, enclosure by others. Canopy includes a flat white canopy with a white 3 wire SJT cord for the standard configuration. Standard cable length is 100". Maximum driver distance is determined by the wire size.
	<b>BBU</b> Battery backup connected to one driver operates for 90 minutes. 120/277v includes test switch and LED indicator. Remote mounting by others.

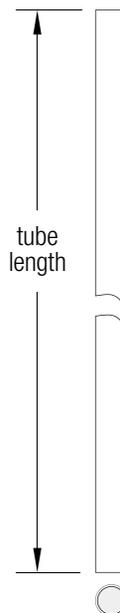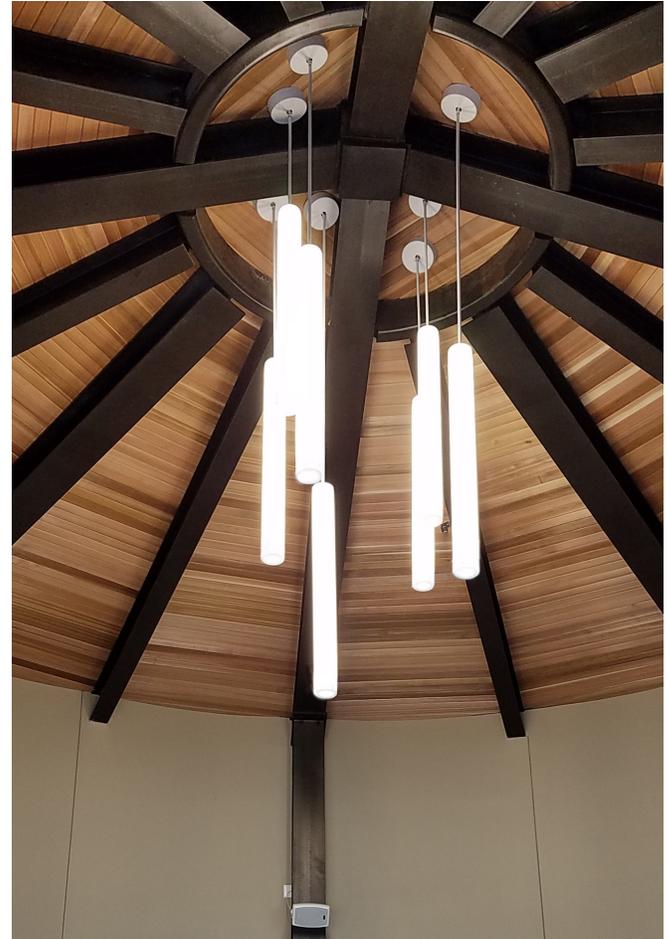

Structure: Aluminum with flow through cooling system in the tube. Standard configuration has drivers located in the canopy.  
 Lens: White acrylic.  
 Certification: UL listed for damp location use.  
 Warranty: 5 year limited warranty.



Made in the USA