


## A modern slimline luminaire



## Features

- Diameter: 4"
- Efficacy: 92 delivered lumens per watt
- Housing: Aluminum tube
- Lens: White acrylic, 12" - 96"
- Mounting: Pendant, rigid stem, ceiling
- Driver: Inside fixture, inside canopy, remote
- Certification: UL listed for damp location use
- Warranty: 5-year limited warranty
- Photometry: ITL Boulder photometric test results and IES files on the web site
- Provides up to 23,000 delivered lumens
- Add a down light with 1,000-3,000Lm and choice of beam pattern
- Engineered with flow-through cooling system within housing
- Mounting for angled or horizontal orientation

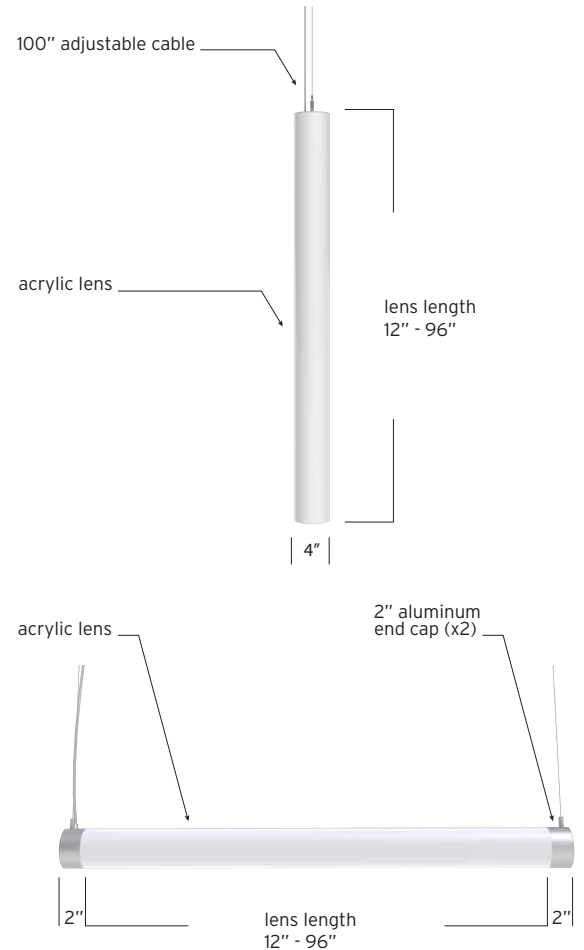

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Date: \_\_\_\_\_

Order: \_\_\_\_\_ Order Example: LC4-84-SO-935-DIM-UNV-GRY-STM-60-BBU

## Order Guide



Lens "	Lumen Output	LED	Optional Down Light	Driver
<p><b>12</b></p> <p><b>24</b></p> <p><b>36</b></p> <p><b>48</b></p> <p><b>60</b></p> <p><b>72</b></p> <p><b>84</b></p> <p><b>96</b></p>	<p><b>SO</b> standard</p> <p><b>MD</b> modify lumens (consult factory)</p>	<p>Static White LED CRI   CCT</p> <p><b>830</b> CRI &gt;80 3000°K</p> <p><b>835</b> CRI &gt;80 3500°K</p> <p><b>840</b> CRI &gt;80 4000°K</p> <p><b>930</b> CRI &gt;90 3000°K</p> <p><b>935</b> CRI &gt;90 3500°K</p> <p><b>940</b> CRI &gt;90 4000°K</p> <p><b>TW</b> tunable white 2700-6500°K</p> <p><b>WD</b> warm dim 2200-3500°K</p> <p>Red, Green, Blue + White LED</p> <p><b>RGBW30</b> RGBW + 3000°K</p> <p><b>RGBW35</b> RGBW + 3500°K</p> <p><b>RGBW40</b> RGBW + 4000°K</p>	<p>Down Light Module</p> <p><b>DNL1</b> 1,125 Lm, 10 W</p> <p><b>DNL2</b> 2,032 Lm, 20 W</p> <p><b>DNL3</b> 3,072 Lm, 30 W*</p> <p>* down lights with output greater than 3,000 Lm are housed in collar below lens; see p.6 <b>CLR</b> option</p> <p>Module Beam Pattern</p> <p><b>S</b> narrow spot</p> <p><b>M</b> medium spot</p> <p><b>W</b> wide beam</p>	<p><b>DIM</b> 0-10V/1%</p> <p><b>DIM-1</b> 0-10 V/.1%</p> <p><b>TRC</b> TRIAC/ELV</p> <p><b>DAL</b> DALI</p> <p><b>DMX</b> Digital Multiplex* *combine with remote option</p> <p>Drivers are rated 120-277 VAC</p>

Mounting	Options	Finish Options
<p>Pendant</p> <p><b>VER</b> vertical suspension</p> <p><b>HOR</b> horizontal suspension</p> <p><b>CCN</b> custom canopy suspension</p> <p>Stem</p> <p><b>STMX</b> Ø 1/2" rigid stem x= length in. (specify length)</p> <p>Surface</p> <p><b>CMT</b> ceiling mounted* *mounting option for 12", 24", 36" lens</p>	<p><b>RMT</b> remote driver</p> <p><b>BBU</b> battery backup</p> <p><b>DIT</b> driver inside tube</p> <p><b>DUC</b> decorative upper collar</p> <p><b>CLR</b> down light inside collar</p>	<p>STM   DIT   DUC   CLR Options</p> <p>Powder Coat</p> <p><b>WHT</b> matte white</p> <p><b>BLK</b> matte black</p> <p><b>ASL</b> anodized silver</p> <p><b>GRY</b> matte gray (RAL 7035)</p> <p><b>RAL</b> RAL code (specify)</p> <p><b>CCL</b> custom color (provide chip)</p> <p>DIT   DUC Options</p> <p>Wood Grain</p> <p><b>WG1</b> ash</p> <p><b>WG2</b> teak</p> <p><b>WG3</b> walnut</p> <p><b>WG4</b> zebra wood</p> <p>Skin</p> <p><b>CFS</b> carbon fiber</p>

Canopy   Cord Options		
Standard	Canopy	Cord
<b>WCC</b>	white	white
<b>BCC</b>	black	black
<b>SCC</b>	silver	silver
<b>MBC</b>	white	silver

RAL Color		
	RAL color	
<b>RCW</b>	RAL color	white
<b>RCB</b>	RAL color	black
<b>RCS</b>	RAL color	silver

Custom Color (CCL)		
	CCL color	
<b>CCW</b>	CCL color	white
<b>CCB</b>	CCL color	black
<b>CCS</b>	CCL color	silver

