


A slender down light ring with brilliant illumination



Features


- Diameter: 24" to 120"
- Efficacy: 54 delivered lumens per watt
- Housing: Formed aluminum
- Lens: Transmissive, frosted acrylic
- Mounting: Pendant, surface
- Driver: Inside canopy, remote
- Certification: UL listed for damp location use
- Warranty: 5-year limited warranty
- Photometry: ITL Boulder photometric report and IES files on the web site
- Rings up to 72" diameter ship in one piece
- Mounting option for Multiple Ring Clusters
- Acoustic Absorber option available

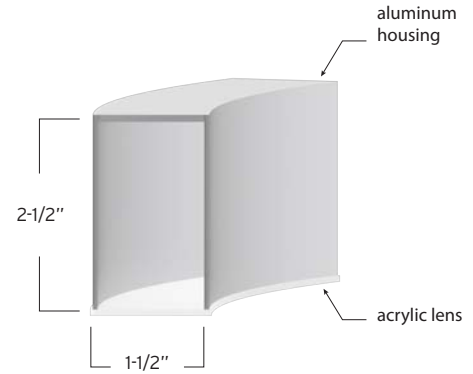

Project: _____ Type: _____ Date: _____

Order: _____

Order Guide



Ø"	Lumen Output	LED	Driver	Fixture Finish
<p>24</p> <p>36</p> <p>48</p> <p>60</p> <p>72</p> <p>84</p> <p>96</p> <p>120</p>	<p>SO standard</p> <p>HO high</p> <p>MD modify lumens (consult factory)</p>	<p>Static White LED CRI CCT</p> <p>830 CRI >80 3000°K</p> <p>835 CRI >80 3500°K</p> <p>840 CRI >80 4000°K</p> <p>930 CRI >90 3000°K</p> <p>935 CRI >90 3500°K</p> <p>940 CRI >90 4000°K</p> <p>TW tunable white 2700-6500°K</p> <p>WD warm dim 2200-3500°K</p> <p>Red, Green, Blue + White LED</p> <p>RGBW30 RGBW + 3000°K</p> <p>RGBW35 RGBW + 3500°K</p> <p>RGBW40 RGBW + 4000°K</p>	<p>DIM 0-10V/1%</p> <p>DIM-.1 0-10 V/.1%</p> <p>TRC TRIAC/ELV</p> <p>DAL DALI</p> <p>DMX Digital Multiplex* *combine with remote option</p> <p>Drivers are rated 120-277 VAC</p>	<p>Powder Coat</p> <p>WHT matte white</p> <p>BLK matte black</p> <p>ASL anodized silver</p> <p>GRY matte gray (RAL 7035)</p> <p>RAL RAL code (specify)</p> <p>CCL custom color (provide chip)</p> <p>Wood Grain</p> <p>WG1 ash</p> <p>WG2 teak</p> <p>WG3 walnut</p> <p>WG4 zebrawood</p> <p>Skin</p> <p>CFS carbon fiber</p>

Mounting	Options	Canopy Cord Finish	Acoustic Absorber																																							
<p>Pendant</p> <p>SPC single point canopies</p> <p>MCC multi-cable center canopy</p> <p>MRC multi-ring cluster</p> <p>Power-over-Cable (PoC)</p> <p>MCC-POC Power-over-Cable + MCC mounting</p> <p>Surface</p> <p>CMT ceiling wall mount</p>	<p>RMT remote driver</p> <p>BBU battery backup</p> <p>EXTIW extend inner wall to 4"OAH</p> <p>EXTOW extend outer wall to 4"OAH</p>	<table border="1"> <thead> <tr> <th>Standard</th> <th>Canopy</th> <th>Cord</th> </tr> </thead> <tbody> <tr> <td>WCC white</td> <td>white</td> <td>white</td> </tr> <tr> <td>BCC black</td> <td>black</td> <td>black</td> </tr> <tr> <td>SCC silver</td> <td>silver</td> <td>silver</td> </tr> <tr> <td>MBC white</td> <td>white</td> <td>silver</td> </tr> </tbody> </table> <p>RAL Color</p> <table border="1"> <thead> <tr> <th></th> <th>RAL color</th> <th>white</th> </tr> </thead> <tbody> <tr> <td>RCW</td> <td>RAL color</td> <td>white</td> </tr> <tr> <td>RCB</td> <td>RAL color</td> <td>black</td> </tr> <tr> <td>RCS</td> <td>RAL color</td> <td>silver</td> </tr> </tbody> </table> <p>Custom Color (CCL)</p> <table border="1"> <thead> <tr> <th></th> <th>CCL color</th> <th>white</th> </tr> </thead> <tbody> <tr> <td>CCW</td> <td>CCL color</td> <td>white</td> </tr> <tr> <td>CCB</td> <td>CCL color</td> <td>black</td> </tr> <tr> <td>CCS</td> <td>CCL color</td> <td>silver</td> </tr> </tbody> </table>	Standard	Canopy	Cord	WCC white	white	white	BCC black	black	black	SCC silver	silver	silver	MBC white	white	silver		RAL color	white	RCW	RAL color	white	RCB	RAL color	black	RCS	RAL color	silver		CCL color	white	CCW	CCL color	white	CCB	CCL color	black	CCS	CCL color	silver	<p>Center Panel Absorber</p> <p>APL light gray</p> <p>APD dark gray</p> <p>APB blue</p> <p>APG green</p> <p>APY yellow</p> <p>APR red</p> <p>Skin Absorber</p> <p>ASL light gray</p> <p>ASD dark gray</p> <p>ASB blue</p> <p>ASG green</p> <p>ASY yellow</p> <p>ASR red</p>
Standard	Canopy	Cord																																								
WCC white	white	white																																								
BCC black	black	black																																								
SCC silver	silver	silver																																								
MBC white	white	silver																																								
	RAL color	white																																								
RCW	RAL color	white																																								
RCB	RAL color	black																																								
RCS	RAL color	silver																																								
	CCL color	white																																								
CCW	CCL color	white																																								
CCB	CCL color	black																																								
CCS	CCL color	silver																																								

Modify & Customize

MOD indicates a modification to standard spec attributes

CSM indicates a customized feature

standard: RPM-DN - 60 - SO - 935 - DIM - BLK - SPC - BCC - APB

modified Lm: **MOD** - RPM-DN - 60 - **MD10000LM** - DIM - ASL - MCC - SCC

custom ring Ø: **CSM** - RPM-DN - **35/55/75** - 840 - DIM - WHT - MRC - WCC

MOD/CSM located at the start of an order sequence

