



A square with soft corners and a brilliant inner wall

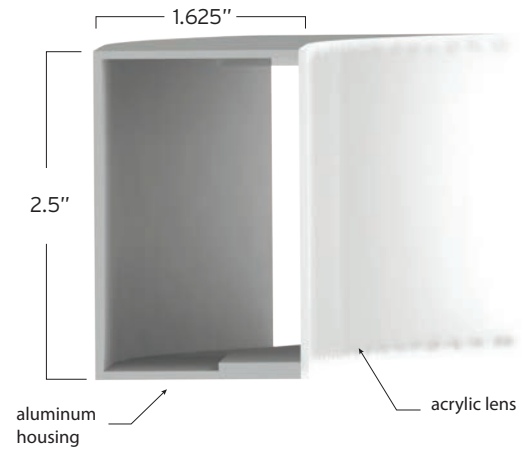

Features

- Sizes: 24", 36", 48", 60", 72", 84", 96"
- Efficacy: 82 delivered lumens per watt
- Housing: Formed aluminum
- Lens: Transmissive, frosted acrylic
- Mounting: Suspension, surface
- Driver: Integral, remote
- Certification: UL listed for damp location use
- Warranty: 5-year limited warranty
- Acoustic Absorber options available

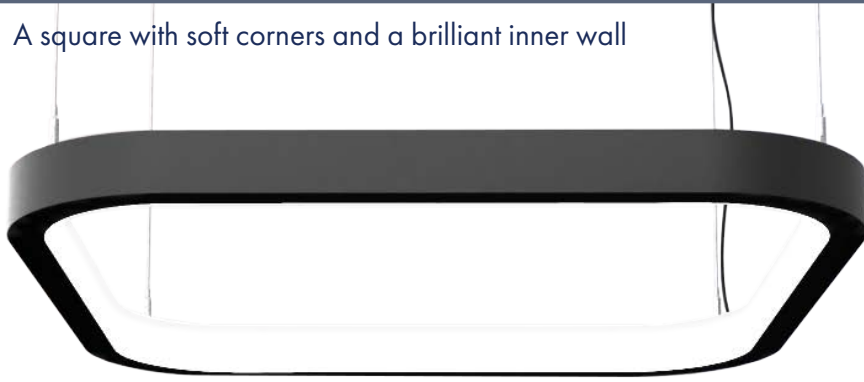

Project: _____ Type: _____ Date: _____

Order: _____

Order Guide



Size "		Lumen Output	p.3	LED	p.3	Driver	p.3	Fixture Finish	p.3
L	W	SO	standard	Static White LED CRI CCT		DIM	0-10V/1%	Powder Coat	
24	24	HO	high	830	CRI >80 3000°K	DIM-.1	0-10 V/.1%	WHT	matte white
36	36	MD	modify lumens (consult factory)	835	CRI >80 3500°K	TRC	TRIAC/ELV	BLK	satın black
48	48			840	CRI >80 4000°K	DAL	DALI	ASL	anodized silver
60	60			930	CRI >90 3000°K	DMX	Digital Multiplex*	GRY	matte gray (RAL 7035)
72	72			935	CRI >90 3500°K	*combine with remote option		RAL	RAL code (specify)
84	84			940	CRI >90 4000°K	Drivers are rated 120-277 VAC		CCL	custom color (provide chip)
96	96			TW	tunable white 2700-6500°K			Wood Grain	
				WD	warm dim 2200-3500°K			WG1	ash
					Red, Green, Blue + White LED			WG2	teak
				RGBW30	RGBW + 3000°K			WG3	walnut
				RGBW35	RGBW + 3500°K			WG4	zebrawood
				RGBW40	RGBW + 4000°K			Skin	
								CFS	carbon fiber

Mounting	p.4-5	Options	p.5	Canopy Cord Finish	p.6	Acoustic Absorber	p.7	
Pendant		RMT	remote driver	Standard	Canopy	Cord	Center Panel Absorber	
SPC	single point canopies	BBU	battery backup	WCC	white	white	APL	light gray
MCC	multi-cable center canopy			BCC	black	black	APD	dark gray
Power-over-Cable (PoC)				SCC	silver	silver	APB	blue
MCC-POC	Power-over-Cable + MCC mounting			MBC	white	silver	APG	green
Surface							APY	yellow
CMT	ceiling wall mount			RAL Color			APR	red
				RCW	RAL color	white	Skin Absorber	
				RCB	RAL color	black	ASL	light gray
				RCS	RAL color	silver	ASD	dark gray
							ASB	blue
							ASG	green
							ASY	yellow
							ASR	red

Modify & Customize

MOD	indicates a modification to standard spec attributes
CSM	indicates a customized feature
standard:	SSQ-IWL - 3636 - SO - 935 - DIM - BLK - SPC - BCC - APB
modified Lm:	MOD - SSQ-IWL - 3636 - MD10000LM - DIM - ASL - MCC - SCC
custom size:	CSM - SR-DN-IWL - 5454 - 840 - DIM - WHT - SPC - WCC
	MOD/CSM located at the start of an order sequence