


Elegantly floating mini ring
with double illumination



Features

- | | | | |
|------------|-------------------------------|---|---------------------------------|
| • Diameter | 24", 36", 48" | • Driver | Inside canopy, remote |
| • Efficacy | 68 delivered lumens per watt | • Certification | UL listed for damp location use |
| • Housing | Formed aluminum | • Warranty | 5-year limited warranty |
| • Lens | Transmissive, frosted acrylic | • Bi-directional lenses provide dual-sided luminosity | |
| • Mounting | Pendant | • Acoustic absorber option available | |

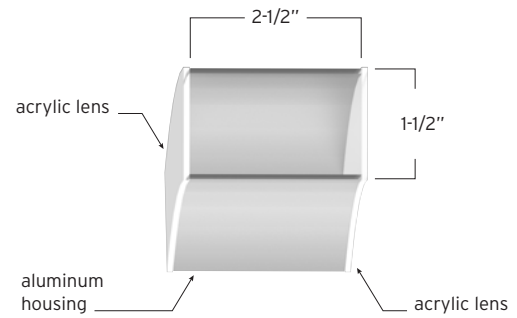

Project: _____ Type: _____ Date: _____

Order: _____

Order Guide



Ø"	Lumen Output	LED	Driver	Fixture Finish
<p>24</p> <p>36</p> <p>48</p>	<p>SO standard</p> <p>MD modify lumens (consult factory)</p>	<p>Static White LED CRI CCT</p> <p>830 CRI >80 3000°K</p> <p>835 CRI >80 3500°K</p> <p>840 CRI >80 4000°K</p> <p>930 CRI >90 3000°K</p> <p>935 CRI >90 3500°K</p> <p>940 CRI >90 4000°K</p> <p>TW tunable white 2700-6500°K</p> <p>WD warm dim 2200-3500°K</p> <p>Red, Green, Blue + White LED</p> <p>RGBW30 RGBW + 3000°K</p> <p>RGBW35 RGBW + 3500°K</p> <p>RGBW40 RGBW + 4000°K</p>	<p>DIM 0-10V/1%</p> <p>DIM-.1 0-10 V/.1%</p> <p>TRC TRIAC/ELV</p> <p>DAL DALI</p> <p>DMX Digital Multiplex* *combine with remote option</p> <p>Drivers are rated 120-277 VAC</p>	<p>Powder Coat</p> <p>WHT matte white</p> <p>BLK matte black</p> <p>ASL anodized silver</p> <p>GRY matte gray (RAL 7035)</p> <p>RAL RAL code (specify)</p> <p>CCL custom color (provide chip)</p> <p>Wood Grain</p> <p>WG1 ash</p> <p>WG2 teak</p> <p>WG3 walnut</p> <p>WG4 zebrawood</p> <p>Skin</p> <p>CFS carbon fiber</p>

Mounting	Options	Canopy Cord Finish	Acoustic Absorber																											
<p>Pendant</p> <p>DCC dual-cable canopy</p>	<p>RMT remote driver</p> <p>BBU battery backup</p>	<table border="1"> <thead> <tr> <th>Standard</th> <th>Canopy</th> <th>Cord</th> </tr> </thead> <tbody> <tr> <td>WCC white</td> <td>white</td> <td>white</td> </tr> <tr> <td>BCC black</td> <td>black</td> <td>black</td> </tr> <tr> <td>SCC silver</td> <td>silver</td> <td>silver</td> </tr> <tr> <td>MBC white</td> <td>white</td> <td>silver</td> </tr> </tbody> </table> <p>RAL Color</p> <table border="1"> <tbody> <tr> <td>RCW RAL color</td> <td>white</td> </tr> <tr> <td>RCB RAL color</td> <td>black</td> </tr> <tr> <td>RCS RAL color</td> <td>silver</td> </tr> </tbody> </table> <p>Custom Color (CCL)</p> <table border="1"> <tbody> <tr> <td>CCW CCL color</td> <td>white</td> </tr> <tr> <td>CCB CCL color</td> <td>black</td> </tr> <tr> <td>CCS CCL color</td> <td>silver</td> </tr> </tbody> </table>	Standard	Canopy	Cord	WCC white	white	white	BCC black	black	black	SCC silver	silver	silver	MBC white	white	silver	RCW RAL color	white	RCB RAL color	black	RCS RAL color	silver	CCW CCL color	white	CCB CCL color	black	CCS CCL color	silver	<p>Skin Absorber</p> <p>ASL light gray</p> <p>ASD dark gray</p> <p>ASB blue</p> <p>ASG green</p> <p>ASY yellow</p> <p>ASR red</p>
Standard	Canopy	Cord																												
WCC white	white	white																												
BCC black	black	black																												
SCC silver	silver	silver																												
MBC white	white	silver																												
RCW RAL color	white																													
RCB RAL color	black																													
RCS RAL color	silver																													
CCW CCL color	white																													
CCB CCL color	black																													
CCS CCL color	silver																													