RP-LUM
Luminous Ring

LUMOS
Architectural Lighting

FULLY LUMINOUS RING OFFERING SOFT, GLARE FREE ILLUMINATION

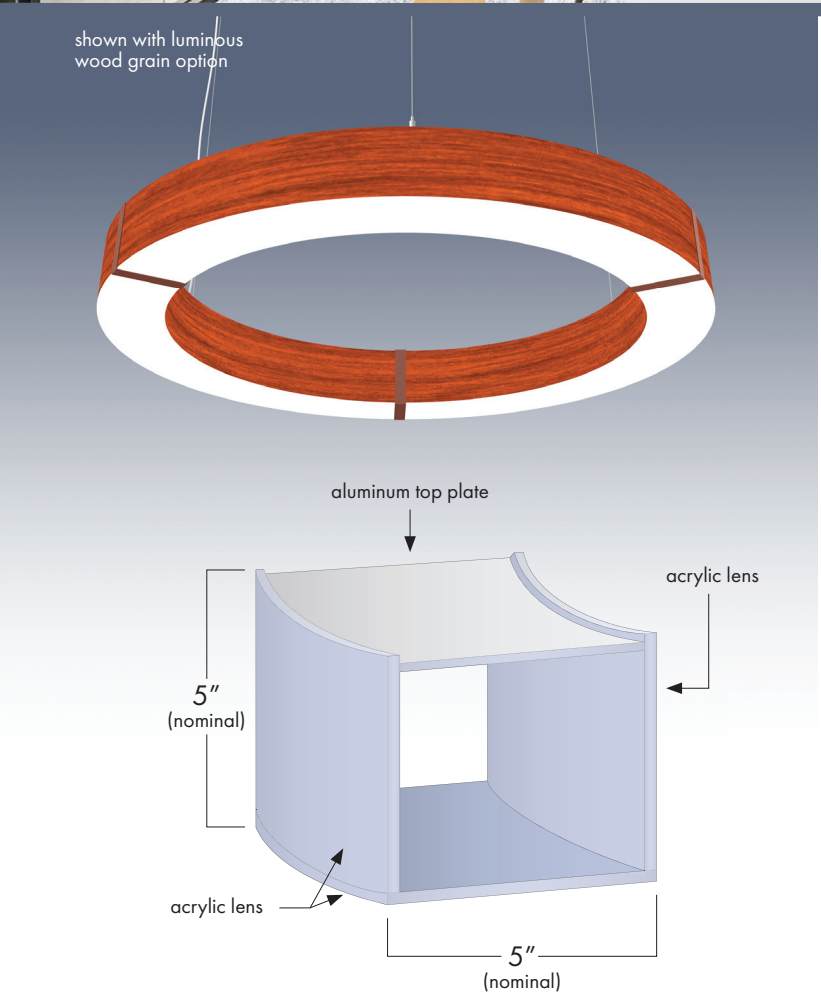

Features

Diameter:	24″ to 144″ (nominal)
Output:	115 LPW
Housing:	Aluminum top plate
Lens:	Transmissive, frosted acrylic
Mounting:	Pendant or surface
Driver:	In canopy or remote
Weight:	5 lb/ft (based on ∅)
Certification:	UL listed for damp location use
Warranty:	5-year limited warranty
Photometry:	Third-party photometric report and IES files on the web site

- Rings up to 72″ ship in one piece
- Mounting options for multi-ring clusters
- RGBW in standard lumen output range
- Acoustic options available

RP-LUM
Luminous Ring

LUMOS
Architectural Lighting

Project: _____ Type: _____ Date: _____

Order: _____

Example: RP-LUM - 60 - HO - RGBW40 - DIM - MCC - WG3 - SCC - RMT

Order Guide

RP-LUM — Ø (in.) — Output — LED — Driver — Mounting — Fixture Finish — Canopy/Cord Finish — Options

Ø (in.)

24
36
48
60
72
84
96
120
144

Lumen Output

SO standard 445 lm/linear ft

HO high 890 lm/linear ft

MD modify lumens and watts (consult factory)

Example Calculation for a 48" High Output Ring:
(4' x 3.14) x 890= 11,178 total lumens

LED

Static White

830	CRI >80	3000°K
835	CRI >80	3500°K
840	CRI >80	4000°K
930	CRI >90	3000°K
935	CRI >90	3500°K
940	CRI >90	4000°K

Dynamic White

TW tunable white 2700-6500 °K

Red, Green, Blue + White

RGBW30 RGBW+3000°K
RGBW35 RGBW+3500°K
RGBW40 RGBW+4000°K

(consult for TW, RGBW)

Driver

DIM 0-10 V/1%
DIM-.1 0-10 V/.1%
TRC TRIAC/ ELV
DAL DALI
DMX Digital Multiplex (consult factory)

Drivers rated 120-277 VAC

Mounting

Pendant

SPC single point canopies
MCC muti-cable center canopy (consult for Ø > 96")
MRC multi-ring cluster (consult for submittals)

Surface

SRF surface mounted

Power-over-Cable (PoC)

MCC-POC Power-over-Cable with multi-cable center canopy (consult for submittals)

Cover Band Finish

Powder Coat

WHT matte white
BLK matte black
ASL anodized silver
GRY matte gray (RAL 7035)
RALX matte RAL color X=code (specify)
CCL custom color (provide chip)

Canopy/Cord Finish

Powder Coat

Standard	Canopy Color	Cord Color
WCC	white	white
BCC	black	black
SCC	silver	silver
MBC	white	silver
RAL		
RCW	RALX	white
RCB	RALX	black
RCS	RALX	silver
Custom		
CCW	CCL	white
CCB	CCL	black
CCS	CCL	silver

Options

RMT remote driver
BBU remote battery back up with remote driver

Luminous Wood Grain

LWG1 ash
LWG2 teak
LWG3 walnut
LWG4 zebrawood