



CHIC GLOWING ORB
WITH REFINED CHARM
AND DISTINCT ELEGANCE



Features

- Diameter:** 8" to 22" (nominal)
- Output:** 91 LPW
- Housing:** Aluminum
- Lens:** Transmissive, opal acrylic globe
- Mounting:** Cord, stem, or surface
- Driver:** In canopy or remote
- Weight:** 5-12 lb (based on Ø)
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website


- Single-piece acrylic globe lens
- Seven diameter options allow flexible scaling
- Multi-sphere clusters with custom canopies
- RGB+W in standard lumen output range

Project: _____ Type: _____ Date: _____

Order: _____

Example: SPH-18 - SO1 - RGBW35 - DMX - STM36 - GRY-RMT

Order Guide

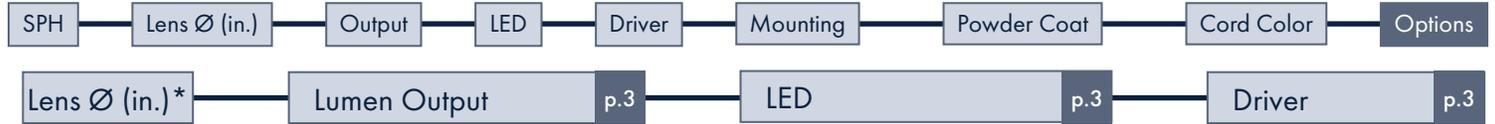

8
10
12
16
18
20
22

(custom tuning available to match surface brightness when using multiple sizes, consult factory)

Sphere Ø in.	Max Weight
8	5 lbs
10	6 lbs
12	7 lbs
16	9 lbs
18	10 lbs
20	11 lbs
22	12 lbs

*custom sizes available

Standard Output | 10" - 22"

SO1	1,369 lm	15 W
SO2	1,826 lm	20 W
SO3	2,282 lm	25 W

High Output* | 18" & 22"

HO1	3,195lm	35 W
HO2	4,108 lm	45 W

*high output not available with SRF mounting)

MD modify lumens and watts (consult factory)

Static White

830	CRI >80	3000°K
835	CRI >80	3500°K
840	CRI >80	4000°K
930	CRI >90	3000°K
935	CRI >90	3500°K
940	CRI >90	4000°K

Dynamic White

TW	tunable white	2700-6500 °K
WD	warm dim	2200-3500 °K

Red, Green, Blue + White

RGBW30	RGB+W	3000°K
RGBW35	RGB+W	3500°K
RGBW40	RGB+W	4000°K

(consult for TW, WD & RGB+W)

DIM	0-10 V/1%
TRC	TRIAC/ ELV
DAL	DALI
DMX	Digital Multiplex (consult factory)

DIM, DALI, DMX drivers rated 120-277 VAC. TRC drivers rated 120 VAC.



Power Cord Pendant*

PCX power cord suspension
X= inches cord length; specify

CCN-PCX/X cluster with custom canopy
X= inches cord length; specify for each sphere
- contact factory for required submittals

*cord lengths over 96" include price add-on

Stem Pendant**

STMX Ø ½" rigid stem
X= inches stem length; specify in 6" increments

CCN-STMX/X cluster with custom canopy
X= inches stem length; specify for each sphere
in 6" increments
- contact factory for required submittals

**max individual stem length = 96"

Surface

SRF surface mount

Powder Coat

WHT	matte white
BLK	matte black
ASL	anodized silver
GRY	matte gray (RAL 7035)
RALX	matte RAL color X=code (specify)
CCL	custom color (provide chip)

Mounting Selection	Powder Coated Features			
	Canopy	Cap	Stem	Collar
PCX CCN-PCX/X	○	○		
STMX CCN-STMX/X	○	○	○	
SRF				○

Specify cord color when power cord mounting is selected (**PCX**, **CCN-PCX**)

PCW	white
PCB	black
PCS	silver braided with clear jacket

RMT	remote driver
RMT-BBU	remote battery backup with remote driver

Order Examples

Stem Pendant: SPH-10 - SO2 - 940 - DIM - **STM42** - WHT

Cord Pendant: SPH-10 - SO2 - 840 - DIM - **PC60** - WHT - PCW

RGBW LED: SPH-18 - SO1 - **RGBW35** - **DMX** - STM36 - GRY

RAL Powder Coat: SPH-18 - HO2 - 840 - DIM - PC36 - **RAL5011** - PCB - RMT

CCN-PCX (3-Sphere Cluster):
SPH-**16/18/22** - SO1 - 935 - DIM - **CCN-PC45/65/25** - ASL - PCS

CCN-STMX (4-Sphere Cluster):
SPH-**10/10/16/22** - SO1 - 930 - DIM - **CCN-STM36/36/48/60** - BLK - RMT

